


(/)

15 Likes


A4988 Stepper Motor Driver Module

22 August 2019 - 0 Comments

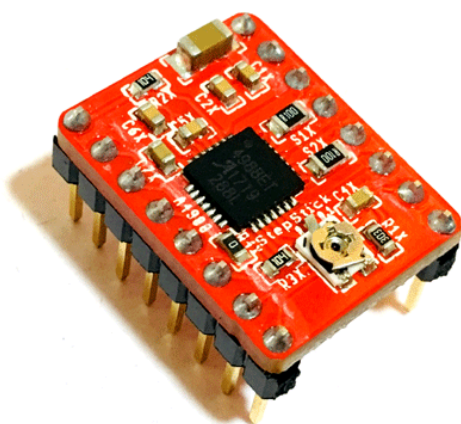

(/sites/default/files/components/A4988-Stepper-Motor-Driver-Module.png)

A4988 Stepper Motor Driver Module

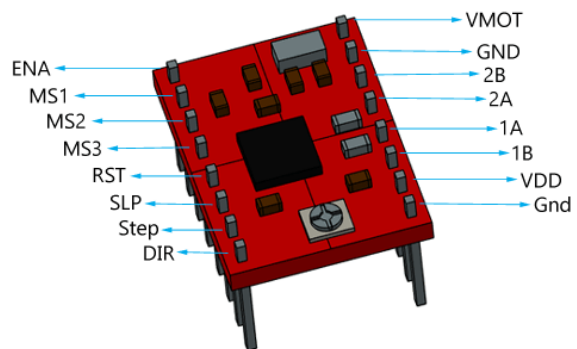

(/sites/default/files/component_pin/A4988-Stepper-Motor-Driver-Module-Pinout.png)

A4988 Pinout

[Click the image to enlarge it]

SPONSORED SEARCHES



[A4988 Driver Datasheet](#)

[Circuit Schematic](#)

The **A4988** is a complete **Microstepping Motor Driver** with built-in translator for easy operation. The driver has a maximum output capacity of 35 V and ± 2 A. It can operate bipolar stepper motors in full-, half-, quarter-, eighth-, and sixteenth-step modes.

Pin Configuration

(/)

VMOT & GND	Used to power the motor
1A, 1B, 2A, 2B	Connected to the 4 coils of motor
15 Likes DIRECTION	Motor Direction Control pin
STEP	Steps Control Pin
MS1, MS2, MS3	Microstep Selection Pins
SLEEP	Pins For Controlling Power States
RESET	
ENABLE	

A4988 Stepper Driver Module Features

- Max. Operating Voltage: 35V
- Min. Operating Voltage: 8V
- Max. Current Per Phase: 2A
- Microstep resolution: Full step, ½ step, ¼ step, 1/8 and 1/16 step
- Reverse voltage protection: No
- Dimensions: 15.5 × 20.5 mm (0.6" × 0.8")
- Short-to-ground and shorted-load protection
- Low RDS(ON) outputs
- Thermal shutdown circuitry


Alternatives for A4988: DRV8825, L6474, L6207, L6208, TMC2208, TMC2209

Note: Complete Technical Details can be found at the A4988 datasheet given at the end of this page.

How to Use A4988 Driver Module

As mentioned earlier A4988 has an inbuilt translator, so only two wires are required to connect it to controller board. Circuit Diagram for interfacing A4988 module with a microcontroller (<https://components101.com/microcontrollers>) to control a stepper motor (<https://components101.com/tags/stepper-motor>) is shown below.

(/)

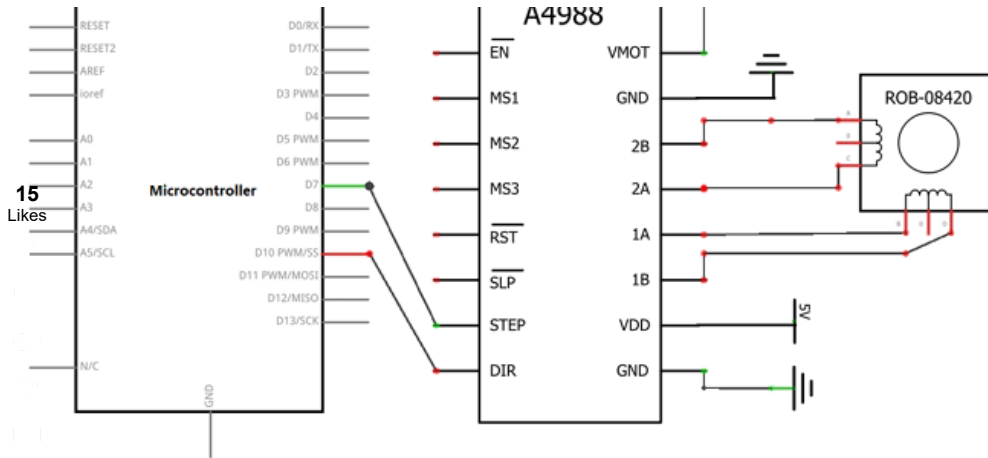

As shown in above diagram only two pins DIR and STEP of module is connected with Arduino. STEP pin used to control the steps while DIR pin is used to control direction. Micro-step pins (MS1, MS2 and MS3) are used to operate the driver module in different step functions. In the above circuit MS1, MS2, and MS3 pins left disconnected, that means the driver will operate in full-step mode. This motor driver (<https://components101.com/tags/motor-driver>) has low-ESR ceramic capacitors (<https://components101.com/ceramic-capacitor-pinout-parameters-datasheet>) on board, which makes it vulnerable to voltage spikes, so it is advised to use at least 47µf capacitor across motor power supply pins. Stepper Motor wires is connected with output pins (1A, 1B, 2A & 2B) of driver module. It is commonly used in controlling the NEMA series stepper motors like NEMA17, NEMA23, and NEMA34




Applications

- Used to control the speed and rotation of stepper motor.
- It is used in robotics to control their motion.
- It is used in different toys.

A4988 IC 2D-Model

(/)

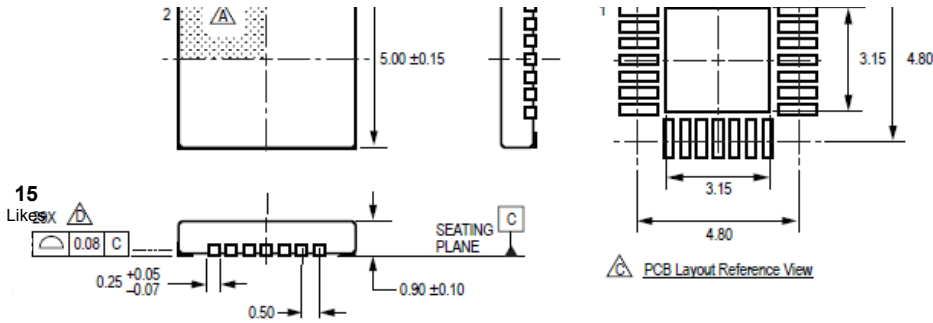

Component Datasheet

A4988 Stepper Motor Driver Module Datasheet

https://components101.com/sites/default/files/component_datasheet/A4988%20Stepper%20M

Tags

MOTOR DRIVER (/TAGS/MOTOR-DRIVER)

STEPPER MOTOR DRIVER (/TAGS/STEPPER-MOTOR-DRIVER)

Get Our Weekly Newsletter!

Subscribe to stay updated with industry's latest Electronics components and news

* indicates required

Email Address *

Name

Subscribe